REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

HSF RoHS

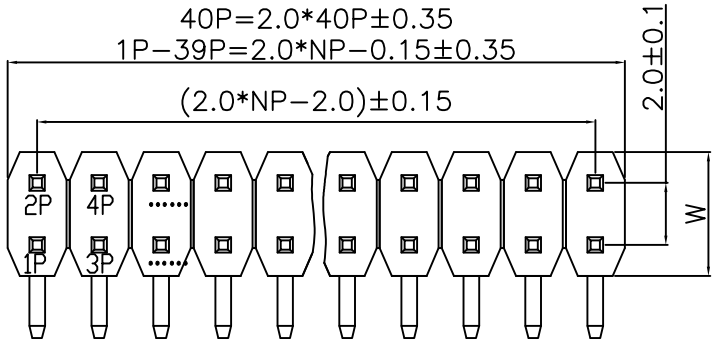

Specifications
1.Current Rating:2.0Amps
2.Insulation Resistance:1000 MΩ min.
3.Dielectric withstanding Voltage: 500V AC/DC
4.Contact Resistance:20 mΩ max.
5.Operating Temperature:-40℃ to+105℃
6.Contact Material: Brass
7.Insulation Material:Asfollows,UL94V-0,Black
8.Plated: Au Over Ni

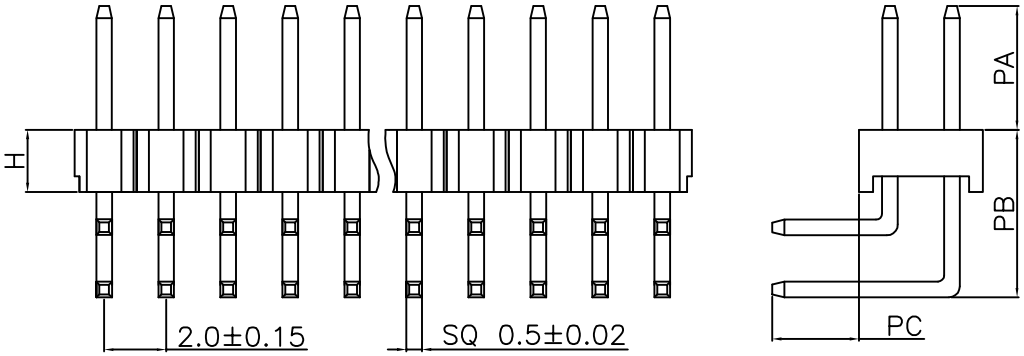

Ordering Information

L206 XX -XX 1 X X XX X

- XX: Insulation Height*Wide (H*W) Option: 10=1.0*2.0, 15=1.5*2.3, 20=2.0*4.0
- XX: NO. of Pins Per Row: 1-50P
- X: Insulation Material Option: 1=PBT, 2=PPS, 3=NY6T, 4=LCP, 5=NY66, 6=Customized, 7=NY46, 8=NY9T
- X: Contact Plating: 0=0.8″ Gold, 1=Au1″ Gold, 2=Au1.5″ Gold, 3=Au2″ Gold, 4=Au3″ Gold, 5=Au5″ Gold, 6=Customized, 7=Gold/Tin, 8=Tin
- XX: Serial NO. 01-69
- X: Packing A=PE Bag, B=Tube, C=Tray, D=Reel

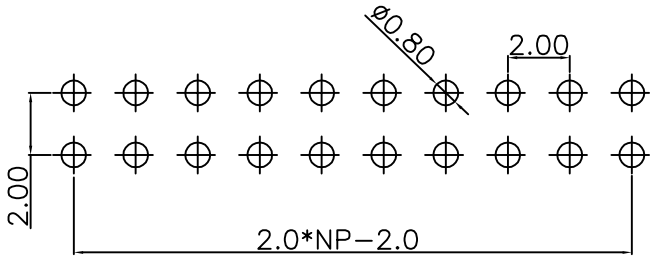

PCB LAYOUT

Dimension antitheses list

ITEM	PC	PB	PA	H	Pin Length
Standard	2.80	5.00	5.00	2.00	10.6/14.6
Alternate					

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 连大 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.00mm Pin Header Dual Row 90°		DRAWN BY	YTT	16.02.03		
PART NO	L20620-XX1XXXXA		CHECKED BY				
DRAWING NO			APPROVED BY				
SCALE	1:1	UNITE	mm	PAGE	1/1	SIZE	A4