
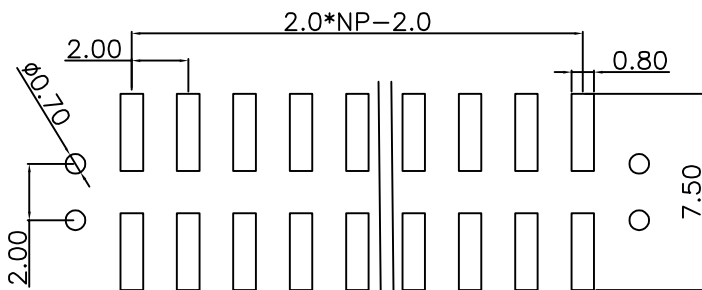
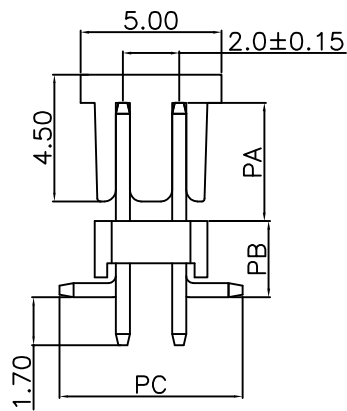
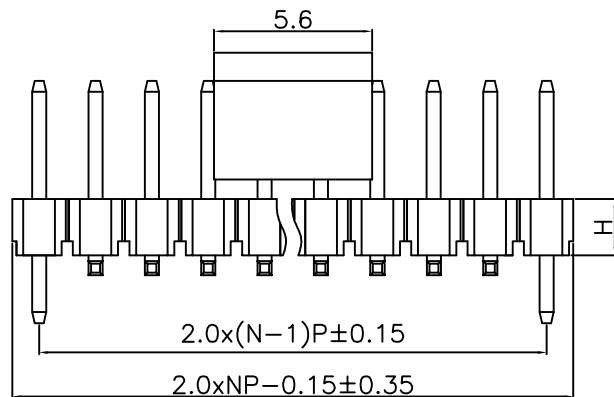


# HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

## Specifications

- 1.Current Rating:2.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

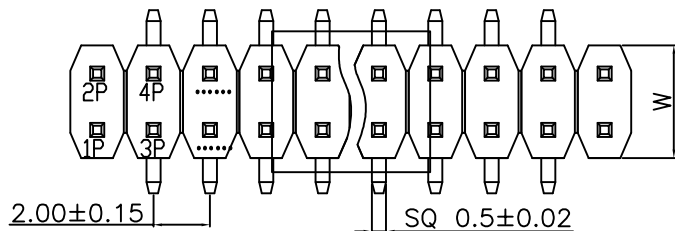

PCB LAYOUT

## Ordering Information

L206 XX -XX 2 X X XX X

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO. 01-69	Packing
Option:					
10=1.0*2.0		1=PBT	0=0.8" Gold		A=PE Bag
15=1.5*2.3		2=PPS	1=Au1" Gold		B=Tube
25=2.54*5.0		3=NY6T	2=Au1.5" Gold		C=Tray
		4=LCP	3=Au2" Gold		D=Reel
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

### Dimension antitheses list

ITEM	PC	PB	PA	H	Pin Length
Standard	6.50	2.70	4.20	2.00	8.60
Alternate					

**LDCONN** 东莞连大精密制品有限公司  
 大 DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE  
(EXCEPT SPECIFIED)

LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

TITLE	PH2.00mm Pin Header Dual Row SMT	DRAWN BY	YTT	16.02.03
PART NO	L20620-XX2XXXXD	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4