

# HSE ROHS


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

### Specifications



- 1.Current Rating:3.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage:1000V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

### Ordering Information

L207 XX -XX I X XX X



Insulation Height*Wide (H*W)	NO. of Pins Per Row:	Insulation Material	Contact Plating	Serial NO.	Packing
1-50P	1-50P	Option:	0=0.8" Gold	01-69	A=PE Bag
Option:		1=BT	1=Au1" Gold		B=Tube
10=1.0*2.0		2=PPS	2=Au1.5" Gold		C=Tray
15=1.5*2.3		3=NW6T	3=Au2" Gold		D=Reel
25=2.54*2.5		4=LCP	4=Au3" Gold		
		5=NY66	5=Au5" Gold		
		6=Customized	6=Customized		
		7=NY46	7=Gold/Tin		
		8=NY9T	8=Tin		

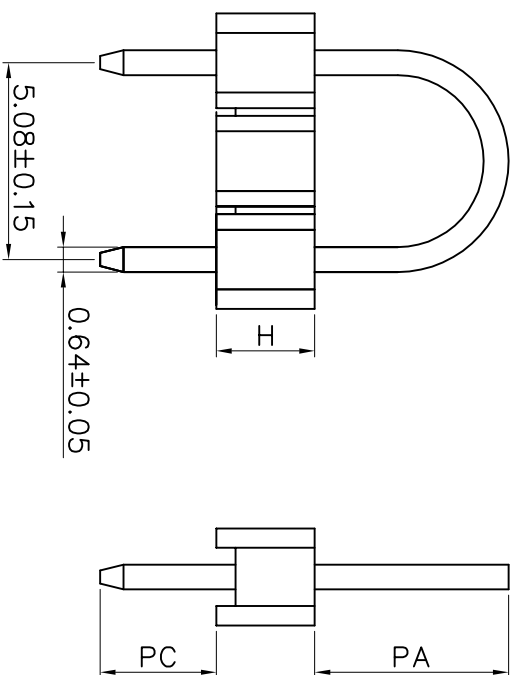

Dimension antitheses list				
ITEM	PC	PA	H	Pin Length
Standard	3.00	5.60	2.54	
Alternate				

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINEAR	ANGLES
.0	±0.30	0.° ±3°
.00	±0.20	.0° ±2°
.000	±0.10	.00° ±1°

<b>LD CONN</b> 东莞连大精密制品有限公司		Dongguan Lianda Precision Products Co., LTD	
TITLE	PH2, 54mm Pin Header Single Row 90°	DRAWN BY	YTT
PART NO	L20725-XX1XXXXA	CHECKED BY	
DRAWING NO		APPROVED BY	
SCALE	1:1	UNITE	mm
		PAGE	1/1
		SIZE	A4