

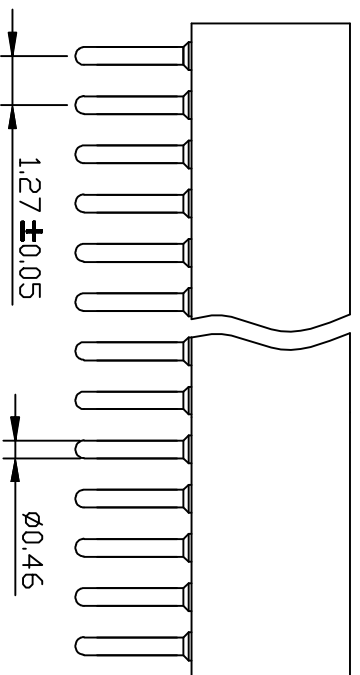


HSE ROHS

REV	EXN NO	DESCRIPTION	DATE	NAME
1		NEW		

Technical Specs:

Insulator: Black glass filled polyester PCT-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass(H59-3)
 Contact clip(3 finger):Beryllium copper(C17300)
 Accepted pin: $\varnothing 0.38$ to 0.50mm
 Fores: (polished steel gauge $\varnothing 0.41\text{mm}$)
 -Insertion 0.5N Typ
 -Withdrawal 0.2N Typ
 Mechanical life: min500 cycles
 Rated current: 1A
 Contact resistance: max 20m Ω
 Dielectric resistance: min 500V RMS

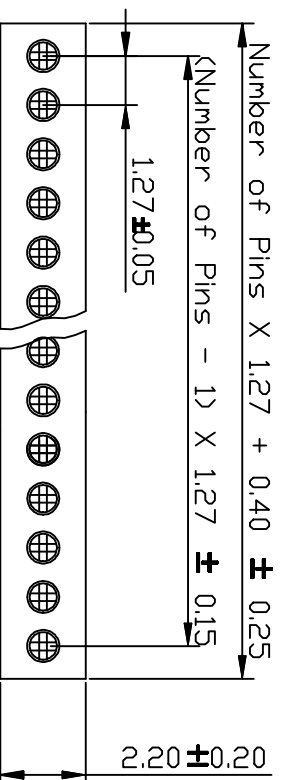

Ordering Information

L488XX - X X XX X

NO. of Pins
 Per Row:
 01-40P

The connection method
 0=180°

Contact Plating
 1=Gold flash
 2=Au/Tin
 3=Tin

Packing
 A=PE Bag
 B=Tube
 C=Trey
 D=Reel

Serial NO.
 01-99

STANDARD TOLERANCE (EXCEPT SPECIFIED)	ANGLES
LINER	0.° ± 3°
.0 ± 0.30	.0° ± 2°
.00 ± 0.20	.00° ± 1°
.000 ± 0.10	

LDCONN 东莞连大精密制品有限公司		Dongguan Lianda Precision Products Co., LTD	
TITLE	ILL. DIM-I: Insulated Pin-to-Header Pad-1 Single row Straight Type	DRAWN BY	Lu Junhui
PART NO	L488CT-001X	CHECKED BY	
DRAWING NO		APPROVED BY	
SCALE	1:1	UNIT	mm
		PAGE	1/1
		SIZE	A4