HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

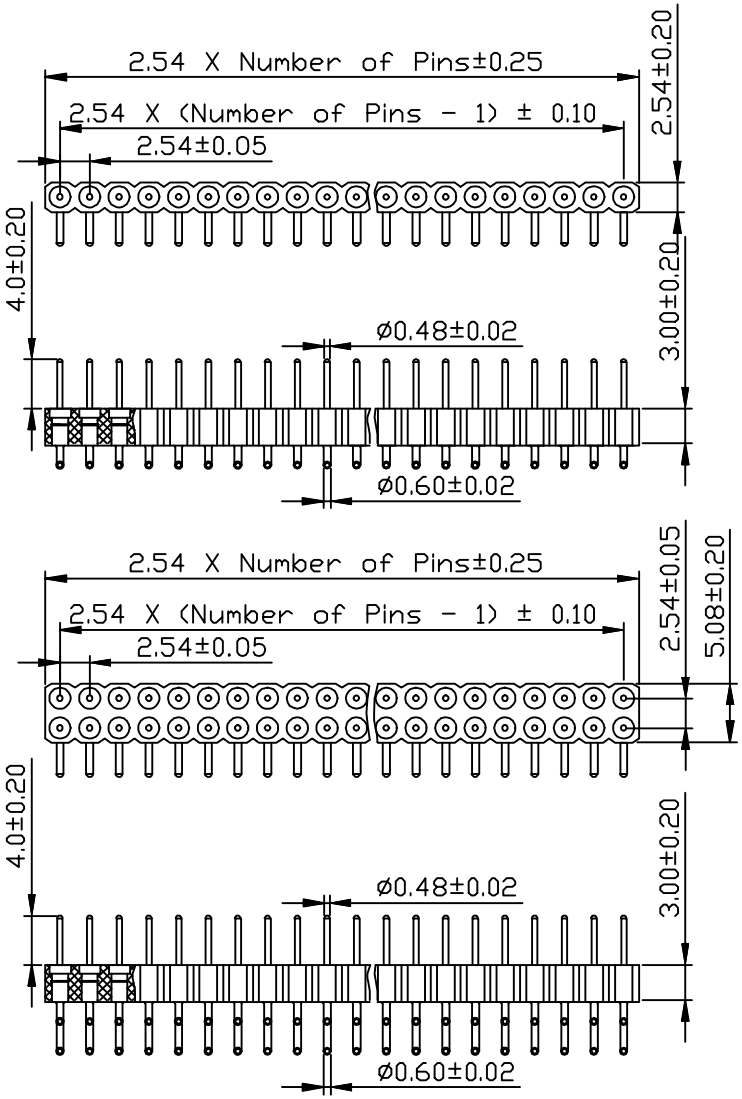



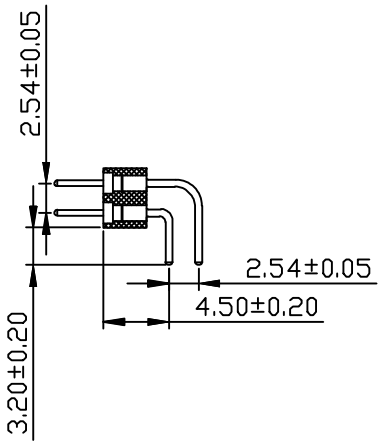

Materials:

Pin :Brass,machined, (H59-3)
Plating:
Tin plated :2u"m/80u"nickel,5um/200u"Tin
Gold plated:2u"m/80u"nickel,full gold
Insulator body(black):Glass filled polyester Valox UL94V-0

Electrical:

Current rating:3 Amps/contact max.
Insulation resistance:"R1000M at V=100V
Operating voltage:60 AC/DC

Mechanical:

Operating temperature :Gold plated:-55 ℃ to +125 ℃
(Continuous) -67 ℉ to +257 ℉
Tin plated:-40 ℃ to +105 ℃
Soldering temperature:260℃,10s max

Ordering Information

L489XX - X X XX X

- XX: NO. of Pins Per Row: 01-40P
- X: The connection method 0=180° 1=90° 2=SMT
- X: Contact Plating 1=Gold flash 2=Au/Tin
- XX: Serial NO. 01-99
- X: Packing A=PE Bag B=Tube C=Tray D=Reel

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司
连 大
DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.54mm-L Machined Male Header H=3.0 Single row/Double row 90° Type		DRAWN BY	Lujunhui	18.11.12		
PART NO	L489XX-1XXXX		CHECKED BY				
DRAWING NO			APPROVED BY				
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4