

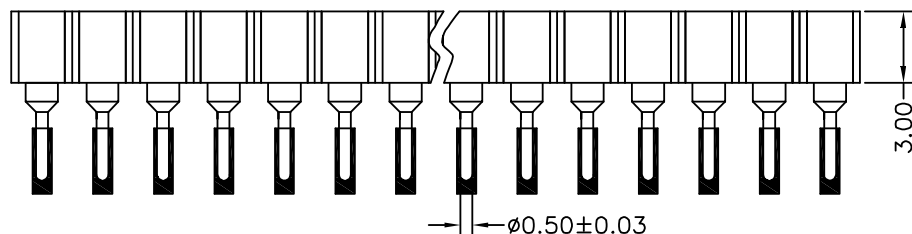


HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	6/17-'20	HYJ

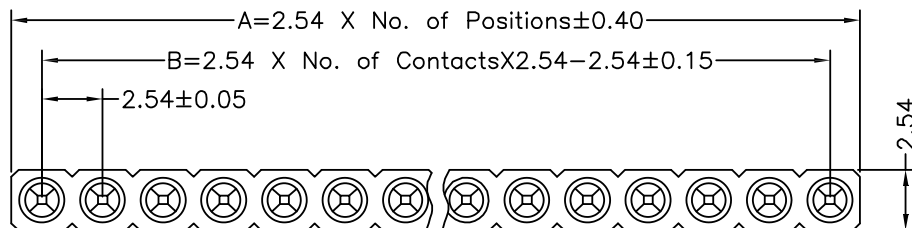

Technical Data

Material:
 Pin(outer sleeve): Brass,machined CuZn38Pb2
 Clip(contact 6 finger): Beryllium Copper,heat treated
Plating(outer sleeve):
 Tin plated:2µm/80µ"Ni, 5µm/200µ"Sn
 Gold Plated:2µm/80µ"Ni,Full gold
Plating(contact): 2µm/80µ"Ni, gold or Tin plated
 Insulator(black): Glass filled thermoplastic polyester
 UL94V-0

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: £4mW/contact
 Insulation resistance: ³ 1000MW at V=100V
 Operating voltage: 60VAC/DC

Mechanical:
 Average insertion force with steel pin of
 Ø0.43mm/0.17": <50g
 Average withdrawal force with steel pin of
 Ø0.43mm/0.17": >1.5g min.
 Mechanical life cycle:min.200
 Operating temperatures: Gold Plsted: -55°C to+105°C
 Tin plated: -40°C to+105°C

Ordering Information

L488XX - X X XX A

P数
 XX=XXP
 产品类型
 9=特殊
 电镀规格
 7=内金外锡
 流水号
 01-99
 包装类型
 A=袋装

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 连大		东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD			
TITLE	排母圆孔型-J PH2.54X3.0 1XNP 贴片 L7.1 PC4.1	DRAWN BY	HYJ	6/17-'20	
PART NO	L488XX-97XXX	CHECKED BY			
DRAWING NO		APPROVED BY			
SCALE	1:1	UNIT	mm	PAGE	1/1
				SIZE	A4