

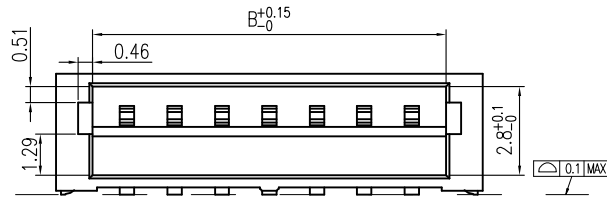
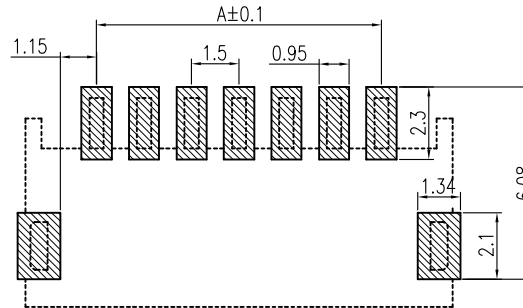




REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	12/30-'20	S X S

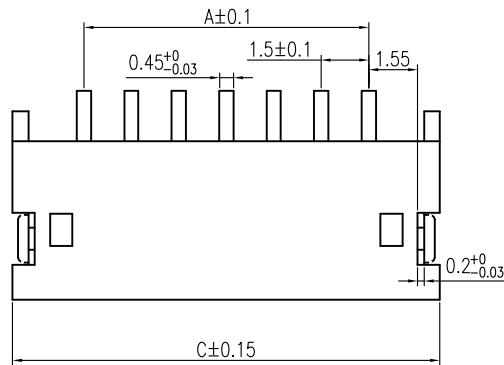

截面 A-A

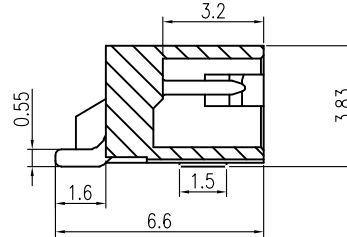

印制线路板

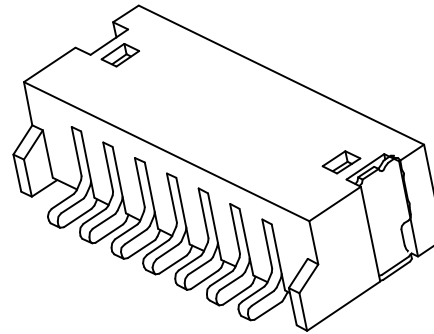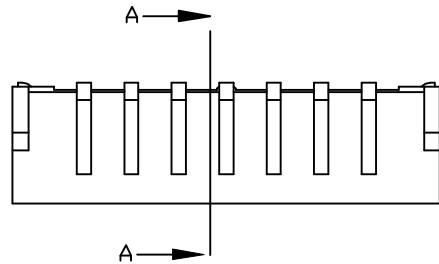

Specifications

- 1.Current Rating: 1Amps
- 2.Rated voltage: 125V AC/DC
- 3.Insulation Resistance: 500 MΩ Min.
- 4.Dielectric withstanding Voltage: 500V AC
- 5.Contact Resistance: 20 mΩ Max.
- 6.Operating Temperature: -25°C to+85°C
- 7.Contact : Phosphor Bronze,Plating Sn
- 8.Positioning pin:Phosphor Bronze,Plating Sn
- 9.Insulation Material: LCP(E130I),UL94V-0
- 10.Marked “*” symbol are major dimensions.

Ordering Information

LA1501 - XX XX L X X XX X

NO. of Pins	Insulation	Insulator	Contact	Serial NO.	Packing
Per Row:	Height	Material	Plating	01-99	A=PE Bag
01-99P	43=4.3mm	1:PBT	G:G/F		B=Tube
		2:LCP	1: Au1u"		C=Tray
		3:NY46	2: Au3u"		D=Reel
		4:NY66	3: Au5u"		
		5:NY6T	4: Au10u"		
		6:NY9T	5: Au15u"		
			6: Au30u"		
			7:Gold/Tin		
			8: Tin		
			9: Customized		

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2P	1.5	3.66	6.02	12P	16.5	18.66	21.02
3P	3.0	5.16	7.52	13P	18.0	20.16	22.52
4P	4.5	6.66	9.02	14P	19.5	21.66	24.02
5P	6.0	8.16	10.52	15P	21.0	23.16	25.52
6P	7.5	9.66	12.02	16P	22.5	24.66	27.02
7P	9.0	11.16	13.52	17P	24.0	26.16	28.52
8P	10.5	12.66	15.02	18P	25.5	27.66	30.02
9P	12.0	14.16	16.52	19P	27.0	29.16	31.52
10P	13.5	15.66	18.02	20P	28.5	30.66	33.02
11P	15.0	17.16	19.52				

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD									
TITLE		WF-LQ PH1.5 1XNP 卧贴 贝吉色			DRAWN BY		ZW		12/30-'20
PART NO.		LA1501-XX43L28XXD			CHECKED BY				
DRAWING NO.		—			APPROVED BY				
SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A 4	