


■ **Specifications**

- Contact resistance:  $\leq 20m\Omega$
- Insulation resistance:  $\geq 1000M\Omega$
- Rated voltage: 250V AC DC
- Rated current: 1.0A AC DC
- Withstand voltage: 1000V AC/minute
- Temperature range:  $-40^{\circ}C \sim +105^{\circ}C$

**A2011AWV** (2.00mm pitch 180°Wafer SMT TYPE)

■ Reference Informations:

Material: Pin: Phosphor Bronze/Tin-plated  
 SolderTabs: Brass/Tin-plated  
 Wafer: LCP,UL94V-0  
 Mates with A2011 series Housing

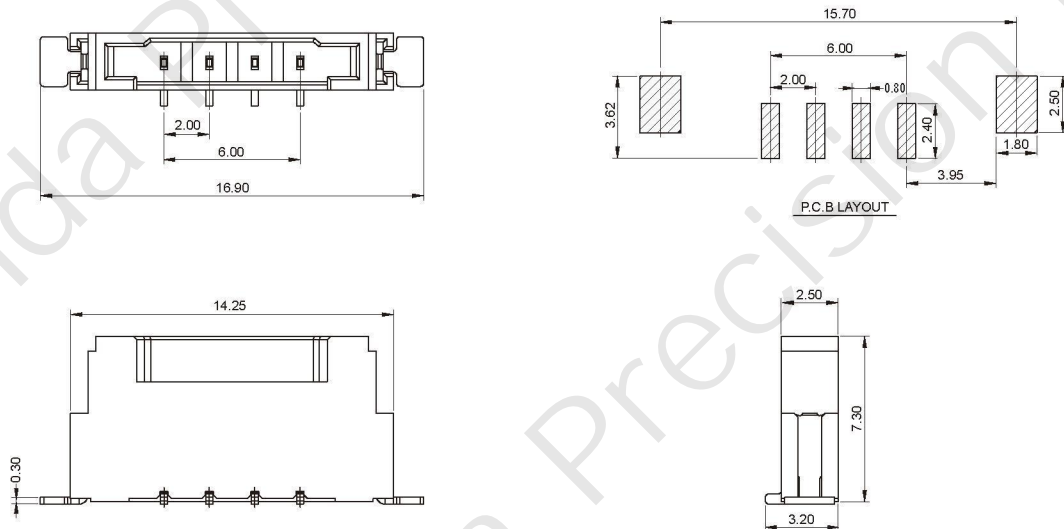

WIRE TO BOARD
BOARD TO BOARD
WIRE TO WIRE
FPC SERIES
THR SERIES
LIGHTING SERIES
OTHER SERIES